Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NE Corner of Section 6, Township 104N Range 16W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 06/04/1997 (DATE) found a DODGE COUNTY ALUM. MONUMENT

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 06/04/1997 (DATE) placed a –

SKETCH OF REFERENCE TIES

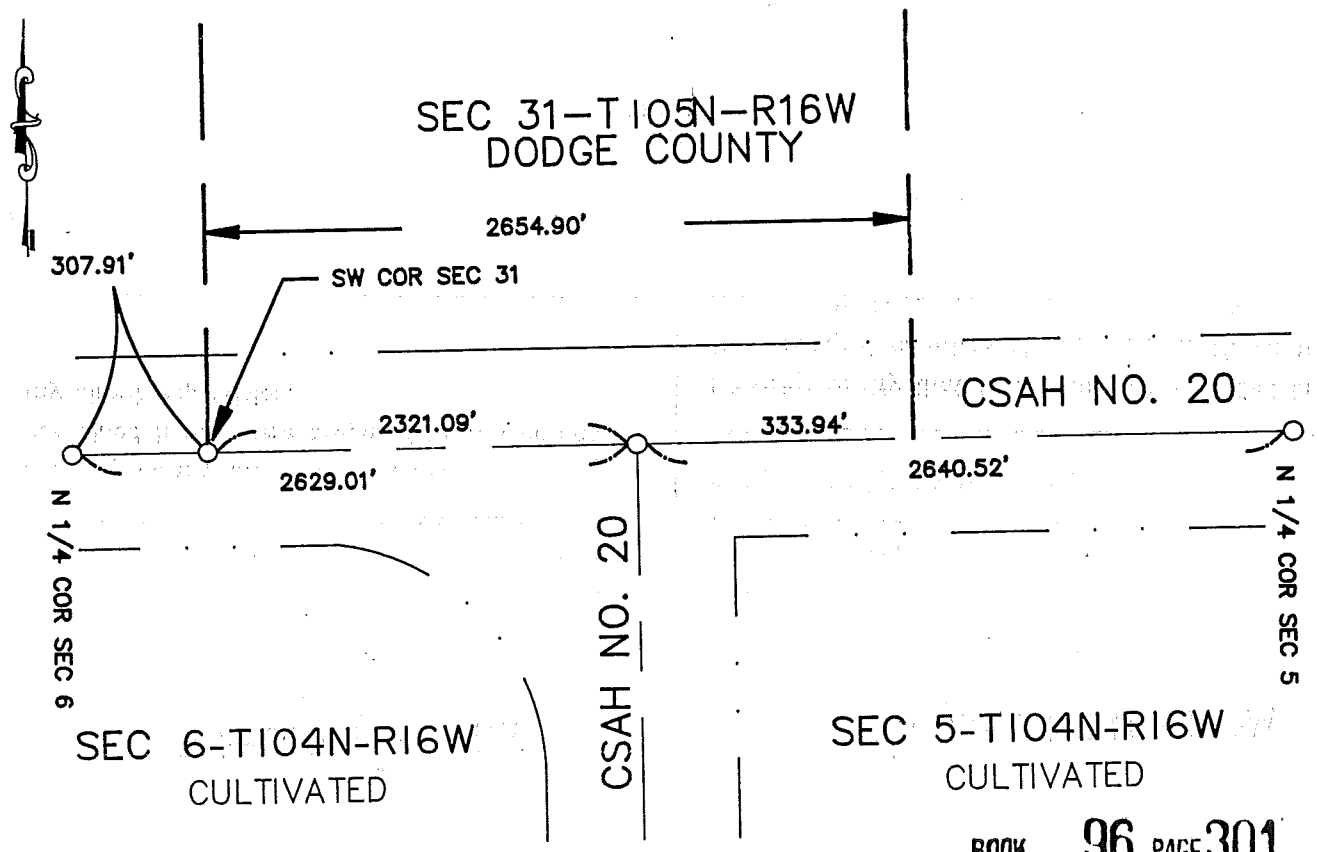

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

BOOK 96 PAGE 301

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-9-97

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2 P .M. on the 10 day of Sept A.D., 1997

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 456005

M.H.D. FORM NO. 2105

Book 96 Misc Page 301

NE Cor SEC 6-104-16

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Office in 1853. The government notes show a wood post was set with mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Tucker Land Surveying

1930 Mower County records show a corner at this location.

1984 R.J. Tucker RLS #15471 excavated for this corner during a survey for CSAH No. 20 and reestablished this corner from information obtained from Mower County CSAH No. 20 1930 grading plans. He then set a Dodge County aluminum monument.

1997 Jones Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, located Dodge County aluminum monument at this corner and took measurements east and west to section and 1/4 section corners on the township lines. Accepted this monument as best evidence of perpetuation of PLS corner for electronic analysis.

The monument fits occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.