Index No. _____

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 24, Township 104N Range 16W, 5TH P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 5-25-93 (DATE) found a NOTHING

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 5-25-93 (DATE) placed a CAST IRON MONUMENT

SKETCH OF REFERENCE TIES

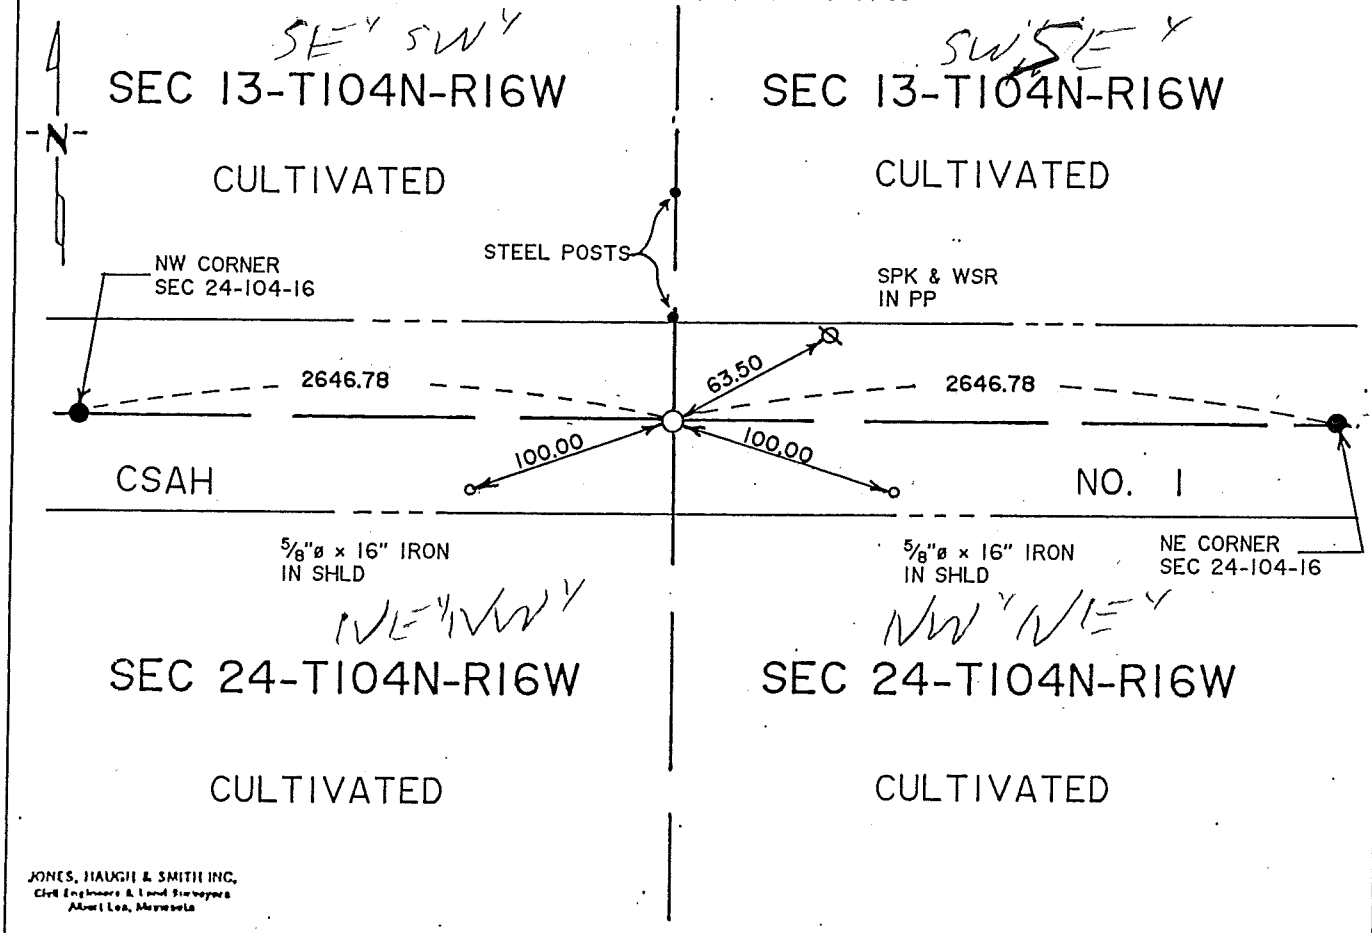


JONES, HAUGH & SMITH INC.
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 6-23-93

Registration No. 13807

☐ Land Surveyor, ☐ Professional Engineer

☑ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 8 A.M. on the 25 day of June A.D., 1993

COUNTY RECORDER Maureen Engen

By Marlene Martin, Deputy

DOCUMENT NO. 421752 Bk 80 Pg 147

M.H.D. FORM NO. 2105 BOOK 80 PAGE 147

STATEMENT OF EVIDENCE

N 1/4 corner Sec 24-104-16

This corner was originally established by Deputy Surveyor of the U.S. General Land Office in 1853. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information:
Mower County Highway Department
Mower County Recorder's Office
Zenk Engineering
Tucker Land Surveying

No information was obtained to support evidence of a perpetuation of the original public land survey corner.

1993 Jones, Haugh & Smith crew under the direction of John Schulte IV, RLS 13807, dug with County backhoe a 3'x8'x4' hole on centerline of County State Aid Highway No. 1 and in line with two steel fence posts running to the north. We found no evidence of the perpetuation of the public land survey corner on the original public land survey corner. Therefore we set this corner on a straight line between the northwest and northeast corners of Section 24 and also at the midpoint of said straight line.

The monument set fits occupation lines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

BOOK 80 PAGE 148