Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

W 1/4 Corner of Section 4, Township 104 Range 18, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch

☐ On 04/08/81 (DATE) found a STONE AND REMAINS OF WOOD STAKE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 4/08/81 (DATE) placed a CAST IRON MON. OVER MON. FOUND IN 1981

SKETCH OF REFERENCE TIES

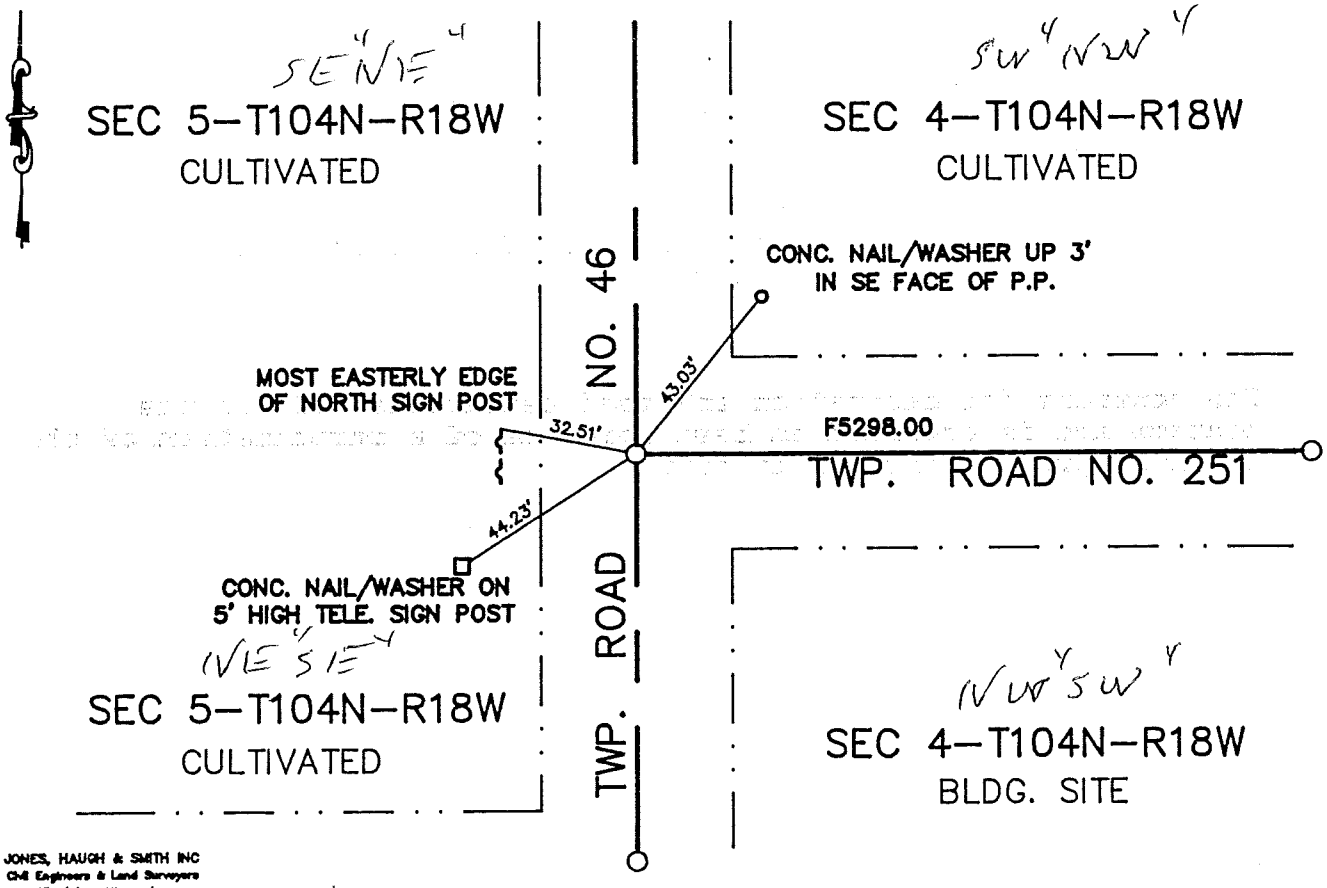

JONES, HAUGH & SMITH INC
Civil Engineers & Land Surveyors
Albert Lea, Minnesota

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein were prepared by me or under my direct supervision.

SIGNATURE _____ DATE 11-1-95

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☒ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER
County of Mower

I hereby certify that this document was filed in the County Rec. office at 2p .M. on the 3 day of Nov A.D., 1995

COUNTY RECORDER Charles Enger

By Susan M. Davis, Deputy

DOCUMENT NO. 140543

M.H.D. FORM NO. 2105 BOOK 89 PAGE 145 Book 89 Misc Page 145

W 1/4 Cor SEC 4-104-18

This corner was originally established by Deputy Surveyor William Anderson of the U.S. General Land Office in 1854. The government notes show a wood post was set with a mound of earth and trench.

The following were contacted for section corner information.

Mower County Highway Dept.
Mower County Recorder
Zenk Engineering
Tucker Land Surveying

No record of this corner was obtained from the above mentioned offices.

1981 Jones, Haugh and Smith crew, under direction of John Schulte, Mower County Surveyor RLS 13807, dug with county backhoe at CL CL of road N-S and road E-W. Found a field stone and remains of a wood stake. Placed a 5/8" iron pin on the south side of the stone. Placed a 5/8" iron pin over the center of the stone.

1995 Found the 5/8" iron pin set in 1981 and placed a cast iron monument over the 5/8" iron pin found.

The monument fit occupation and road centerlines within the section and is accepted as best evidence of a perpetuation of the original public land survey corner.

For electronic survey data and analysis, contact the firm of Jones, Haugh and Smith Inc.