Index No. _____

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NW Corner of Section 7, Township 104N, Range 17W, 5th P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

☐ On 6-4-90 (DATE) found a 1"Ø pipe 1.0' below road surface.

☐ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

☐ On 6-4-90 (DATE) placed a capped 5/8"Ø (13807) iron at location of pipe.

SKETCH OF REFERENCE TIES

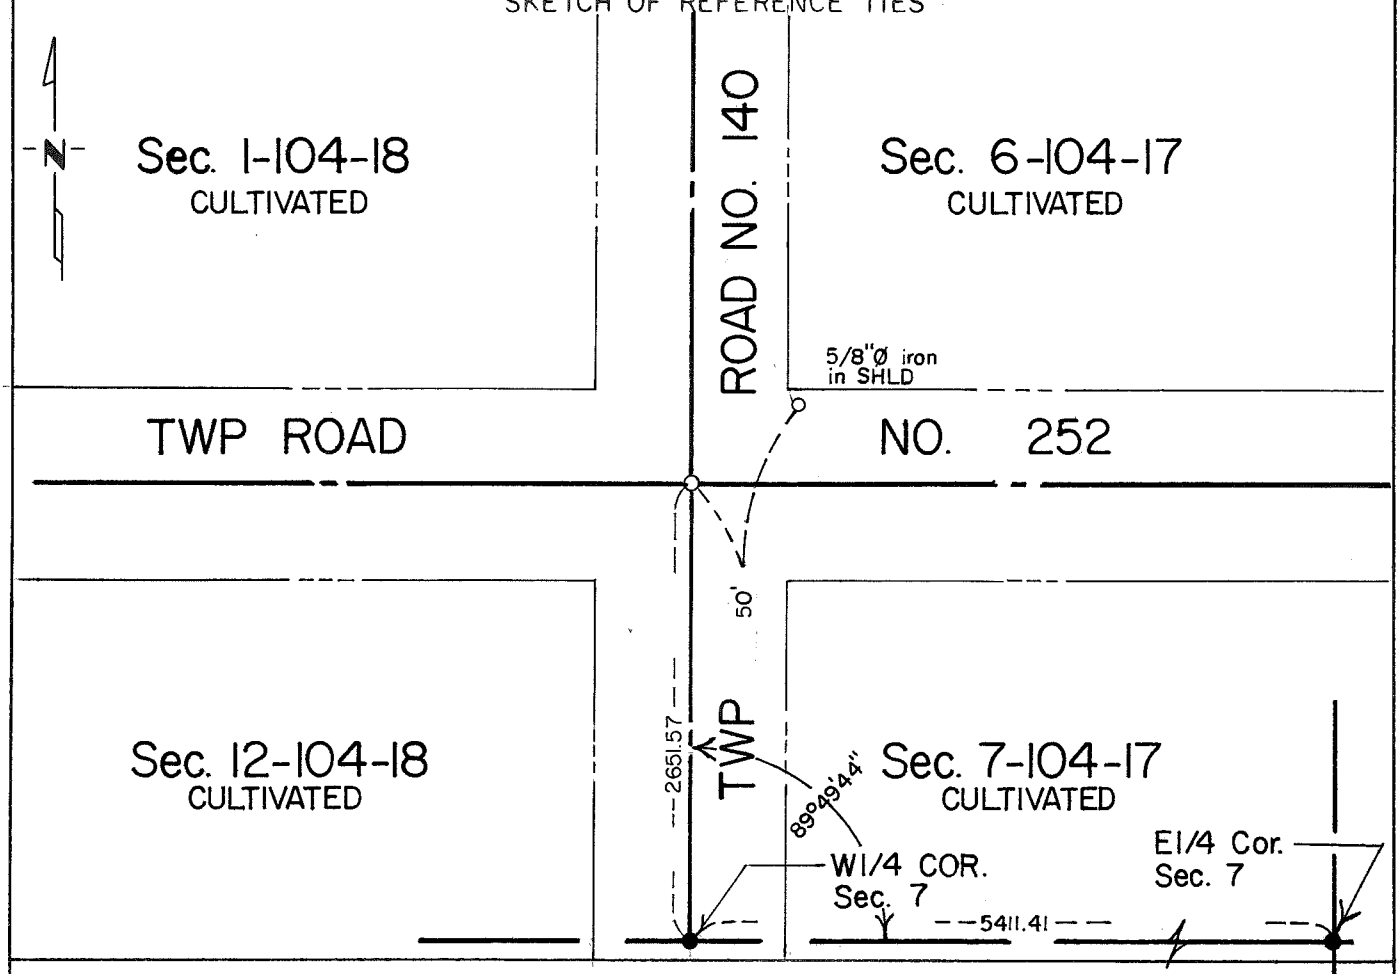

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

SIGNATURE _____ DATE 9-18-90

Registration No. 13807

☒ Land Surveyor, ☐ Professional Engineer

☐ County Surveyor, ☐ County Engineer

OFFICE OF THE COUNTY RECORDER

County of _____

I hereby certify that this document was filed in the County Rec. office at _____ .M. on the _____ day of _____ A.D., 19 ___

COUNTY RECORDER _____

By _____, Deputy

DOCUMENT NO. _____

M.H.D. FORM NO. 2105

STATEMENT OF EVIDENCE

NW corner Section 7-104-17

This corner was originally established by Deputy Surveyor Elisha S. Norris of the U.S. General Land Survey Office in 1853. The government notes show this corner was marked with a wood post, a trench with a mound of earth and a charred stake in center.

The following were contacted for section corner information:

Mower County Engineering Department
Mower County Recorder's Office

1931 V.A. Nason uncovered a concrete monument one foot below road surface and took ties. It was recorded in Book 'A' at the County Engineer's Office.

1940 Mower County Grading Plan shows a 1" diameter pipe was placed.

1990 Jones, Haugh & Smith crew together with the Mower County backhoe dug on centerline centerline of north-south-east-west roads and uncovered 1" diameter pipe 1.0 feet below road surface. Continued digging and found no further evidence. Reset capped 5/8" diameter iron at location of monument found.

Corner found fits road centerlines and Mower County Grading Plan and is accepted as best evidence of a perpetuation of the public land survey corner.

For electronic survey data and analysis contact the firm of Jones, Haugh & Smith Inc.