CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 22, Township 104N, Range 18W, 5 P.M.

STATE OF MINNESOTA, County of MOWER


At the corner location shown on the sketch:

On 7-10-90 found STONE

☒ left monument as found, ☐ lowered monument, ☐ removed monument (explain)

On 7-11-90 placed 3/4" REBAR AND COUNTY CAP OVER STONE

SKETCH OF REFERENCE TIES

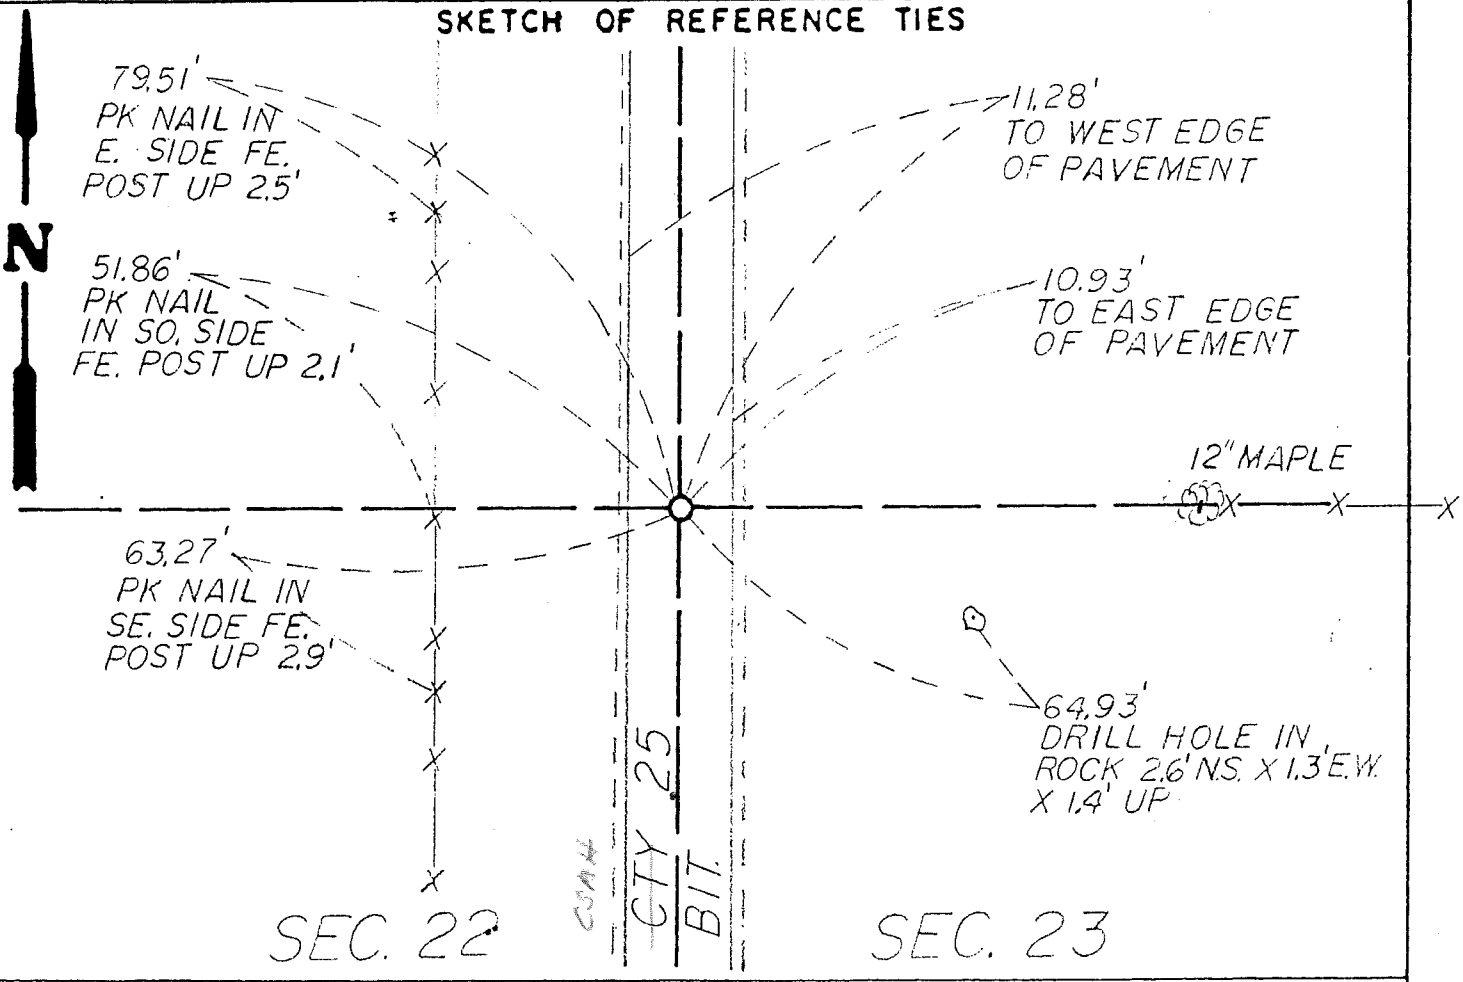

Statement of evidence relative to this corner location is on back of page

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Ronald J. Olson — Signature
7-13-90 — Date

Registration No. 11009

☒ Land Surveyor ☐ Prof Engineer
☐ County Surveyor ☐ County Engineer

Zenk•Read•Trygstad & ASSOCIATES, INC.
Engineers / Architects / Land Surveyors / Planners
Box 689, Albert Lea, MN 56007 507/373-0689

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____ .M. on the ____ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

Statement of Evidence

EAST QUARTER CORNER SECTION 22, TOWNSHIP 104 NORTH, RANGE 18 WEST, 5TH P.M.

July, 1854 — William Anderson, Deputy Surveyor, set a post at the corner during the original Public Land Survey.

1936 — County Engineers Road Plans show section line crossing at Station 205+31.

1962 — County Engineers Road Plans show a concrete monument inplace.

July 6, 1990 — Zenk Read Trygstad & Associates excavated 4.5 feet deep 2 feet East to 2 feet West of centerline and 4 feet south to 8 feet North of fence to the East.

A stone was found 3.3 feet below the surface in mottled soil, and a 1/2 inch pipe and cap # 11009 was set on the Northwest side of the stone at the time of excavation.

An analysis of the record data gives no indication of the origin of the stone. The concrete monument over the stone shows the County has used the stone as the corner. Similar stones have been found at other corners in the area and is accepted as marking the location of the corner of the original Public Land Survey.