CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 30, Township ~~103~~ 104, Range 15,

5th P.M. STATE OF MINNESOTA, County of Mower


At the corner location shown on the sketch:

☒ On 6-13-90 found a Concrete Monument 1.0' below surface on centerline of road.

☒ left monument as found, ☐ lowered monument, ☐ removed monument (expl.)

☐ On _____ placed a _____

SKETCH OF REFERENCE TIES

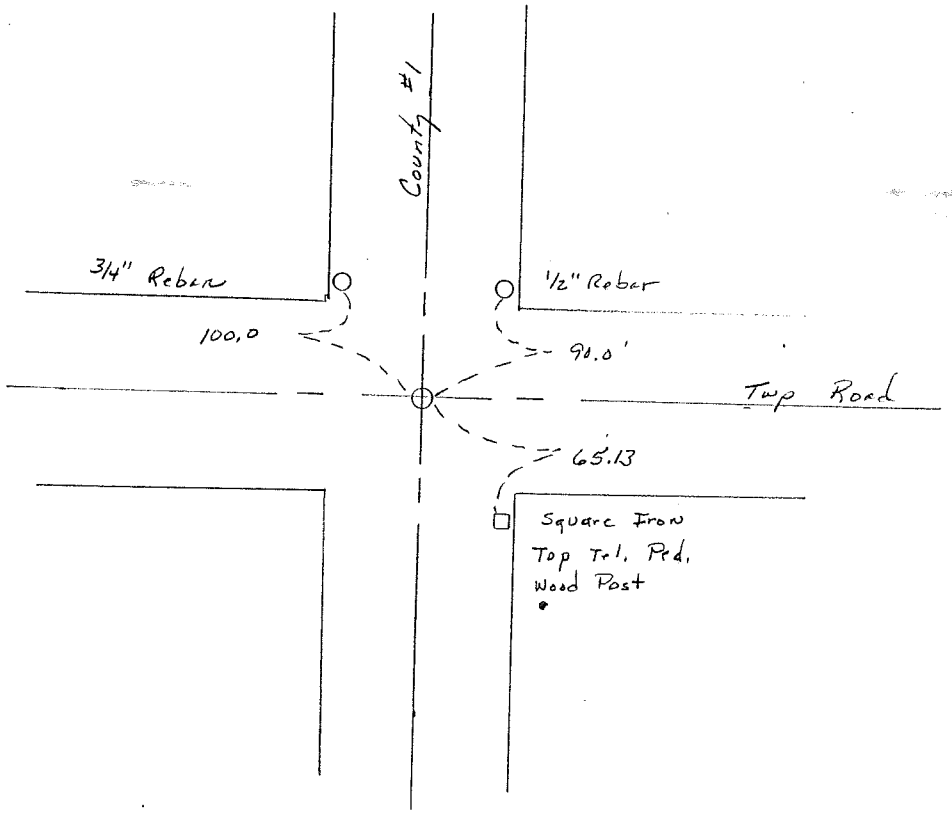

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Raymond J. Tucker — Signature

6-29-90 — Date

Registration No. 15471

☒ Land Surveyor, ☐ Prof. Engineer

☐ County Surveyor, ☐ County Engr.

OFFICE OF THE COUNTY RECORDER
County of _____

I hereby certify that this document was filed in the County Recorders office at _____.M. on the ___ day of _____ A.D., 19___.

County Recorder _____

By _____, Deputy

DOCUMENT NO. _____

STATEMENT OF EVIDENCE:

NORTHEAST CORNER SECTION 30 - T~~103~~104N - R15W

1853 - John Quigley, Deputy Surveyor, set post for corner, built mound, with trench per instructon put handfull small stones in center and planted osage orange seeds in SE corner during the Original Public Land Survey.

1949 - Mower County Highway Department notes show an inplace concrete monument.

March 1990 - Mower County Highway Department notes show an inplace concrete monument.

June 1990 - Tucker Land Surveying excavated this location and found a concrete monument 1.0 feet below on Centerline of road.

The above corner agrees with a electronic survey made of monuments and occupation lines in the area and is accepted as a perpetuation of the public land survey corner.

For details of the analysis and electronic survey data contact: Tucker Land Surveying, Dexter, Minnesota 55926.